



Rethink direct-apply, glue-up wall and ceiling panel applications. pinta acoustic's lightweight, Class A fire-rated smooth-surface WILLTEC® Flat Sheets are readily available in a variety of shapes, sizes and thicknesses with square- or bevel-edge options. WILLTEC Flat Sheet panels provide superior sound absorption and limitless design possibilities at economical costs.

>> | **Advantages**

- Quick, efficient and low-cost applications to plan and work
- 30- to 50-percent panel coverage is typically all that's necessary
- WILLTEC panels can easily be cut to fit on-site
- pinta acouSTIC adhesive adheres to most substrates
- Standard, premium and custom water-based coatings

2601 49th Avenue North, Suite 400  
Minneapolis, MN 55430  
+1 612-355-4200  
1-800-662-0032  
sales@pinta-acoustic.com  
www.pinta-acoustic.com

### WILLTEC Flat Sheet Material

- Made from smooth, natural light grey or white open-cell, expanded melamine foam
- Square-cut 90- or 15-, 22.5-, 30- and 45-degree bevel edge options
- Standard HPC acoustic coating in white, ivory, beige, light blue, light, medium or dark greys, black and other premium and custom color options

### Sizes

- Panel Sizes: various square and rectangular shapes up to 48 x 96 inches (1219 to 2438 mm) as well as circular, triangular, trapezoidal and custom
- Various Thicknesses: 1 to 4 inches (25 to 102 mm) and custom

### Applications

- Smooth, clean and level, dust- and oil-free natural or painted drywall, concrete, plywood or metal substrates
- Best suited for small or large, open flat, sloped or curved ceilings; custom-size bay sections, square or rectilinear waffle slab fit-outs
- Open-plan office, educational, dining and retail environments, etc., anywhere acoustic comfort is desired

### Assembly


- Use clean, thin white cotton gloves to handle panels
- Cut acouSTIC adhesive cartridge tip to produce ¼ inch (6.4 mm)-diameter bead
- Run a continuous bead of adhesive around the panel's perimeter, approximately 1.5 inch (38 mm) from edges, then apply intermittent beads from opposite corners through the center of the panel creating an X
- Press panel firmly into place and smooth evenly across it to ensure a strong lasting bond; adhesive tack should be immediate

### Physical Data—WILLTEC® foam

Material	Open-cell melamine-based foam
Density	0.5 to 0.7 lbs./cu. ft. (0.014 to 0.020), ASTM D3574-77
Long-Term Service Temperature	302°F (150°C)
Fire Resistance	Class 1 per ASTM E 84 (all finishes) Meets UL 1715 (WILLTEC natural) CAN/ULC-S102
Flame Spread per ASTM E 84	Natural: 5 HPC-coated: 15
Smoke Density per ASTM E 84	Natural: 50 HPC-coated: 100
Fungus Resistance	Rating 0 per ASTM G21
Microbial Growth	Passes UL 181, section 11
Finishes	Natural (white and light grey) or water-based HPC-coated (standard, premium and custom colors)

### Sound Absorption

Finish	Thickness	Coefficients per ASTM C423-90a							Mounting Type
		125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	NRC	
Natural (white and light grey)	1"	0.13	0.25	0.60	0.85	0.96	0.95	0.65	A
	1-1/2"	0.08	0.29	0.73	0.94	0.97	0.89	0.75	B
	2"	0.19	0.55	1.17	1.21	1.15	1.13	1.00	A
	2-1/2"	0.19	0.62	1.15	1.21	1.14	1.2	1.05	B
	3"	0.09	0.68	1.2	1.18	1.12	1.05	1.05	A
HPC-coated (standard, premium and custom colors)	2"	0.13	0.41	1.02	1.18	1.18	1.13	0.95	B
	3"	0.13	0.85	1.25	1.22	1.13	1.14	1.1	A

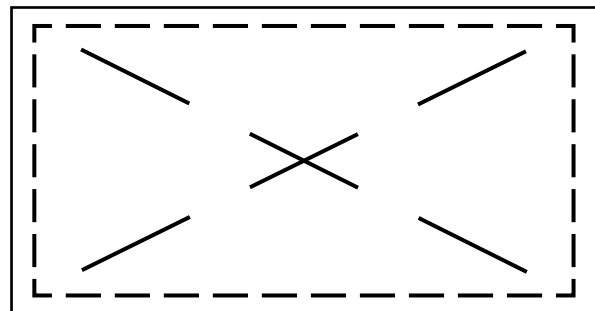

## >> Other Products

- Ceiling Clouds
- Ceiling Tiles
- Wall Panels
- Baffles
- Barriers, Foams and Composites

2601 49th Avenue North, Suite 400  
 Minneapolis, MN 55430  
 +1 612-355-4200  
 1-800-662-0032  
 sales@pinta-acoustic.com  
 www.pinta-acoustic.com